

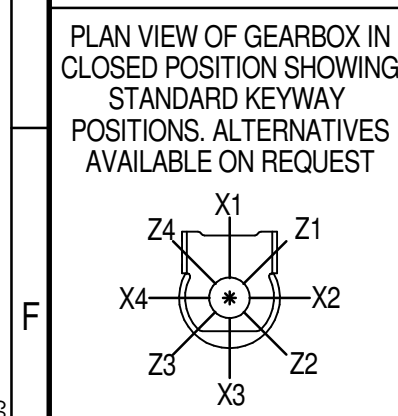
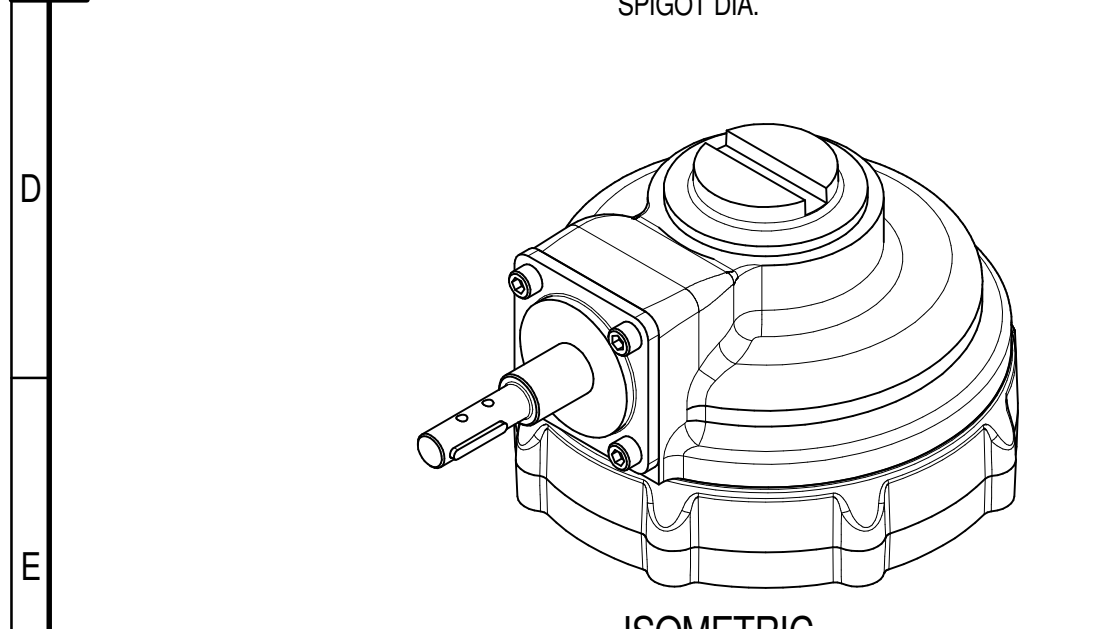
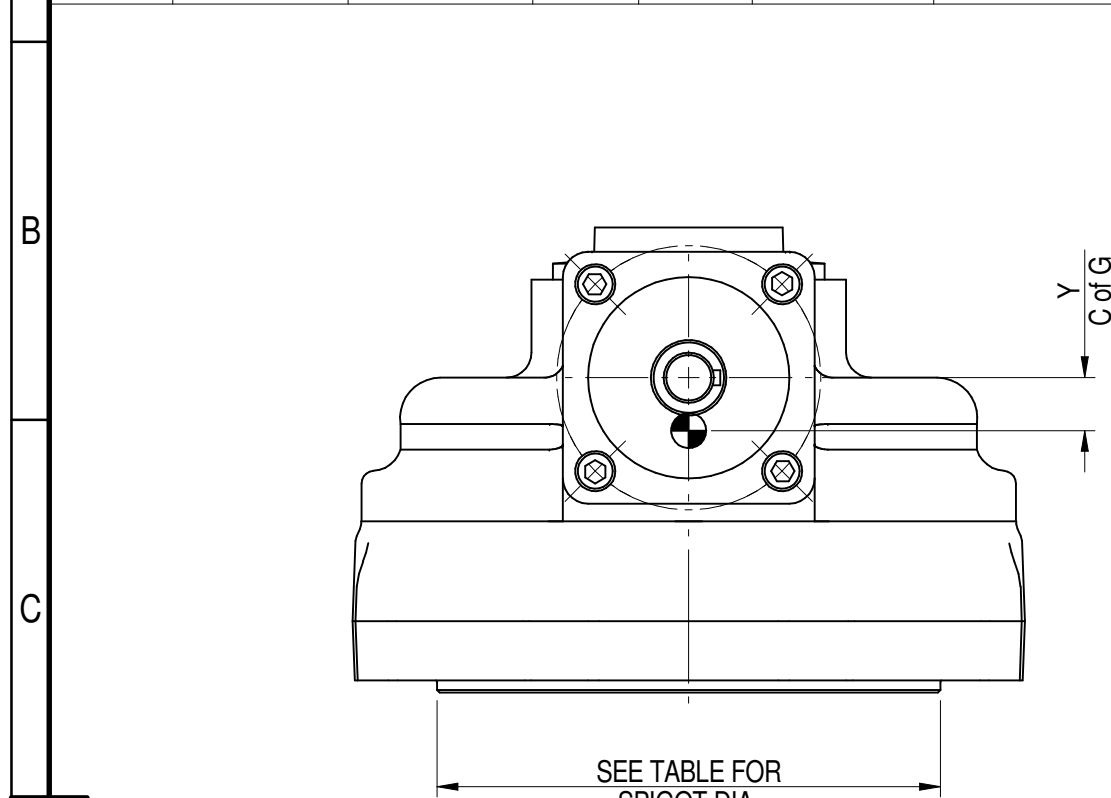


1	2		3		4			5		6			7			8	
INPUT FLANGE DETAILS							MOUNTING HOLES - BOLT CIRCLE (OFF CENTRES)			STEM ACCEPTANCE IN ACCORDANCE TO STANDARD							
INPUT FLANGE	FLANGE O/DIA. + THICKNESS	SHAFT DIA.	RECESS DIA.	RECESS DEPTH	HOLE DETAILS (OFF CENTRES)	KEY DETAILS	ISO 5211 / MSS SP-101 MOUNTING OPTION	HOLE DETAILS (22.5° OFF CENTRES OR AS SHOWN)	SPIGOT DIAMETER	MAX SCREW STEM ACCEPTANCE	STANDARD	MIN BORE	SQ KEY MAX BORE	SQ KEY SIZE	RECT. KEY MAX BORE	RECT. KEY SIZE	SQ BORE MAX
-	-	19.98-0.05 (0.787"-0.002")	-	-	-	6x6x40 (0.24"x0.24"x1.57")	F25	8xM16x20 (0.79") DEEP ON Ø254 (Ø10.00") P.C.	Ø199.95-0.05 (Ø7.872"-0.002")	73 (2.875")	BS4235	-	-	-	68.0	20 x 12	□ 53.3 (2.100")
-	-	-	-	-	-	FA25	8x5/8"UNCx20 (0.79") DEEP ON Ø254.4 (Ø10.00") P.C.	Ø152.25-0.25 (Ø5.994"-0.010")	ANSI B17.1		-	2.500"	5/8" SQ.	2.625"	5/8" x 7/16"	-	
-	-	-	-	-	-	-	-	-	-	-	DIN 6885	-	-	-	-	-	-

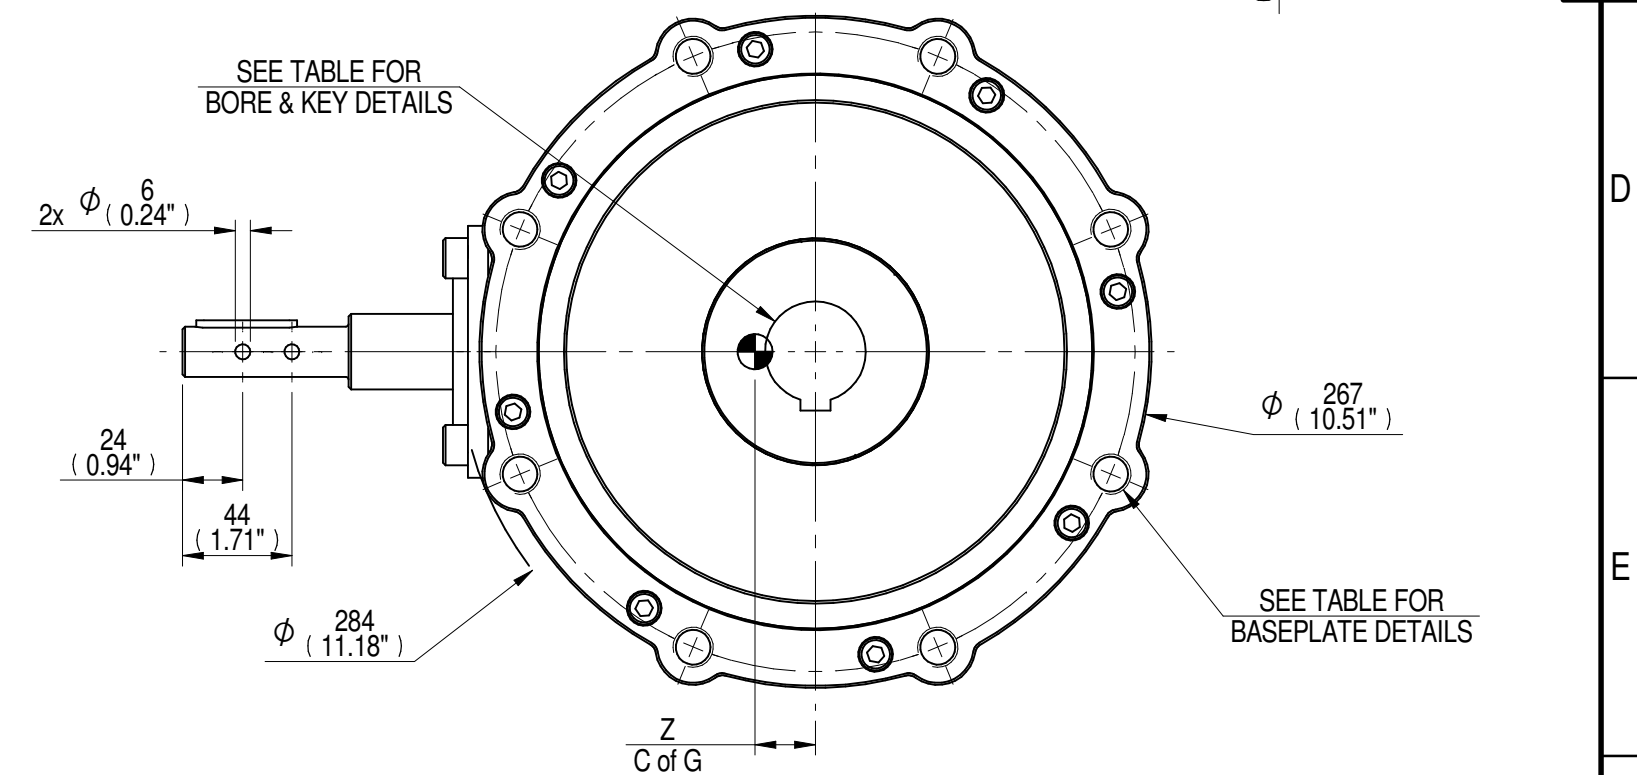

DESCRIPTION	TORQUE	CENTRE OF GRAVITY
6:1	5.1	40.00 kg
4:1	3.4	40.6 kg
RATIO	M.A.	WEIGHT
	MAX OUTPUT	MAX INPUT
	X	Y
	Z	

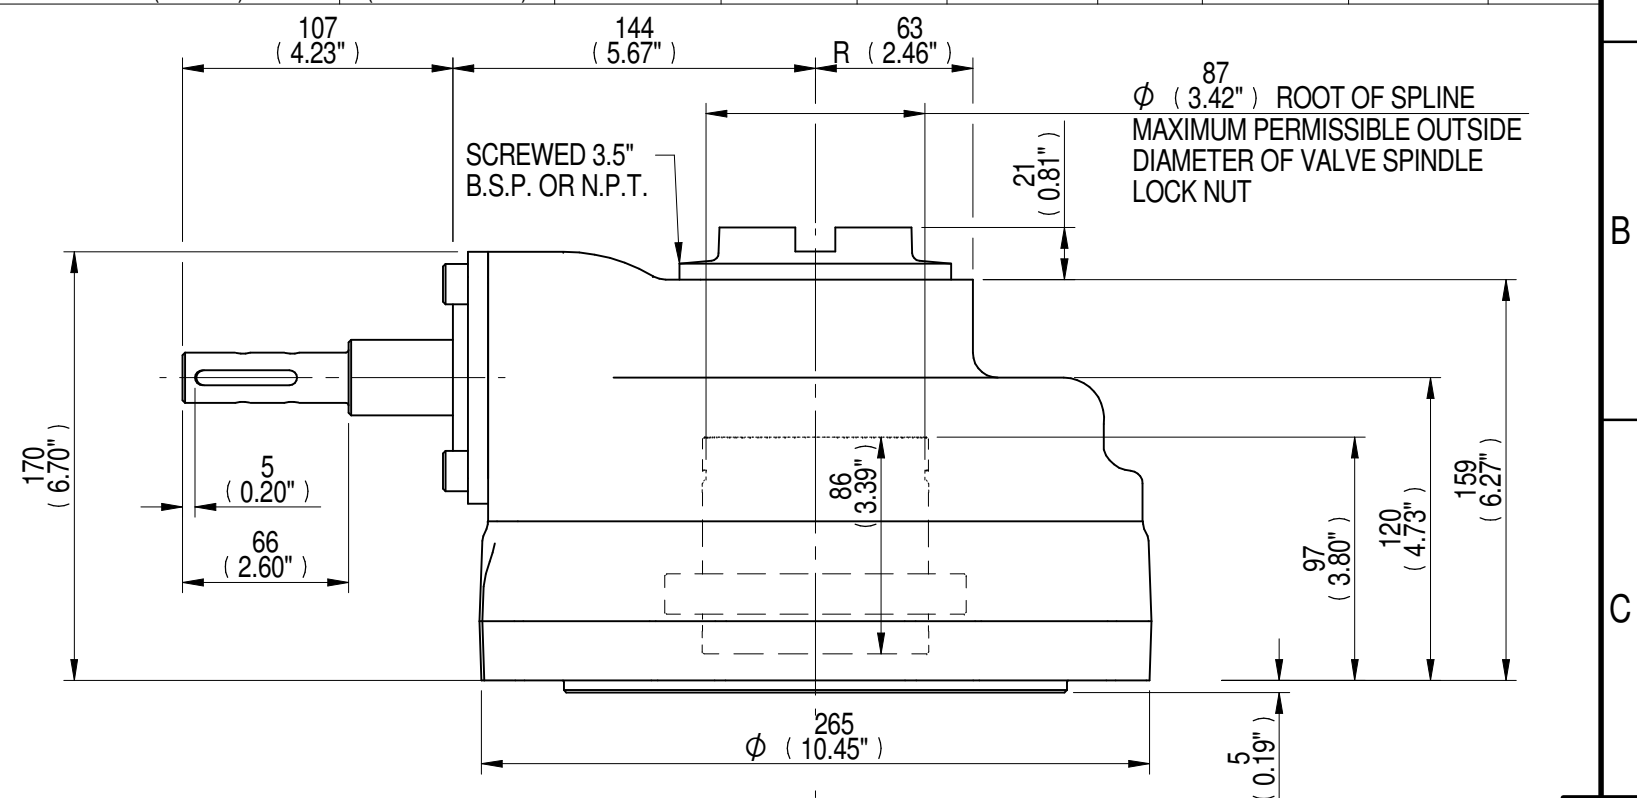

AS PART OF CONTINUOUS PRODUCT DEVELOPMENT, ALL DETAILS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE. FOR UP TO DATE DETAILS PLEASE VISIT [www.rotork.com](http://www.rotork.com)

**rotork** Gears  
LEEDS - UK  
[www.rotork.com](http://www.rotork.com)

This drawing is confidential and is the property of Rotork Gears and must not be reproduced either wholly or partly. All rights in respect of patents, designs and copyrights are reserved. © 2015

Document Type	<b>PUBLICITY</b>	Mass	<b>40.00 kg</b>	Title	<b>HOB7 GEARBOX MANUAL INPUT F25/FA25 OUTPUT</b>
Created	<b>J. DICKINSON</b>	30/03/2015	Dimensions in mm	Scale	<b>1:3</b>
Checked	<b>R. DIX</b>	31/03/2015	Drawing Number	<b>PUB-HOB7-F25</b>	
Approved	-	-	Sheet	1 of 1	Size <b>A3</b>