
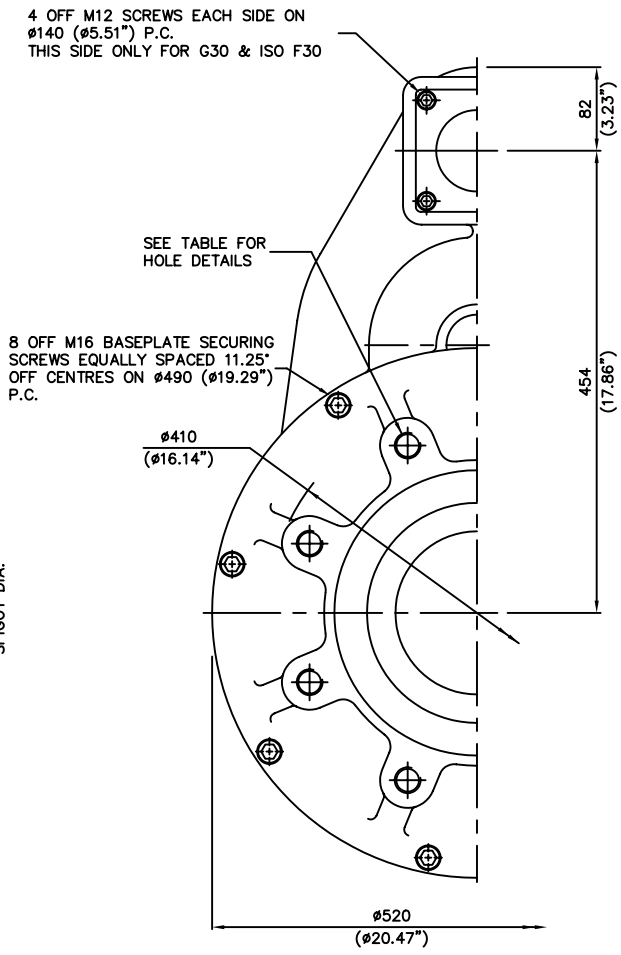


INPUT FLANGE DETAILS							
	FLANGE O/DIA.	SHAFT DIA.	SHAFT EXTENSION	RECESS DIA.	RECESS DEPTH	HOLE DETAILS (OFF CENTRES)	KEY DETAILS
ISO F16	ø210 (ø8.27")	ø40.00 -0.05 (ø1.575" -0.002")	60 (2.36")	ø130.05 +0.05 (ø5.120" +0.002")	5 (0.20")	4 HOLES ø20.5 (ø0.81") ON ø165.0 (ø6.50") P.C.	12x8x55 (0.47"x0.31"x2.17")
FA16	ø210 (ø8.27")	ø40.00 -0.05 (ø1.575" -0.002")	60 (2.36")	ø126.92 +0.05 (ø4.997" +0.002")	5 (0.20")	4 HOLES ø20.5 (ø0.81") ON ø165.0 (ø6.50") P.C.	12x8x55 (0.47"x0.31"x2.17")
ISO F25	ø300 (ø11.81")	ø50.00 -0.05 (ø1.969" -0.002")	60 (2.36")	ø200.10 +0.10 (ø7.878" +0.004")	5 (0.20")	8 HOLES ø16.5 (ø0.65") ON ø254.0 (ø10.00") P.C.	14x9x55 (0.55"x0.35"x2.17")
FA25	ø300 (ø11.81")	ø50.00 -0.05 (ø1.969" -0.002")	60 (2.36")	ø152.37 +0.10 (ø5.999" +0.004")	5 (0.20")	8 HOLES ø16.5 (ø0.65") ON ø254.0 (ø10.00") P.C.	14x9x55 (0.55"x0.35"x2.17")
ISO F30	ø350 (ø13.78")	ø50.00 -0.05 (ø1.969" -0.002")	60 (2.36")	ø230.10 +0.10 (ø9.059" +0.004")	6 (0.24")	8 HOLES ø20.5 (ø0.81") ON ø298.0 (ø11.73") P.C.	14x9x55 (0.55"x0.35"x2.17")
ROTORK G30	ø418 (ø16.46")	ø50.00 -0.05 (ø1.969" -0.002")	60 (2.36")	ø216.10 +0.10 (ø8.508" +0.004")	6 (0.24")	8 HOLES ø23.0 (ø0.91") ON ø356.0 (ø14.02") P.C.	14x9x55 (0.55"x0.35"x2.17")

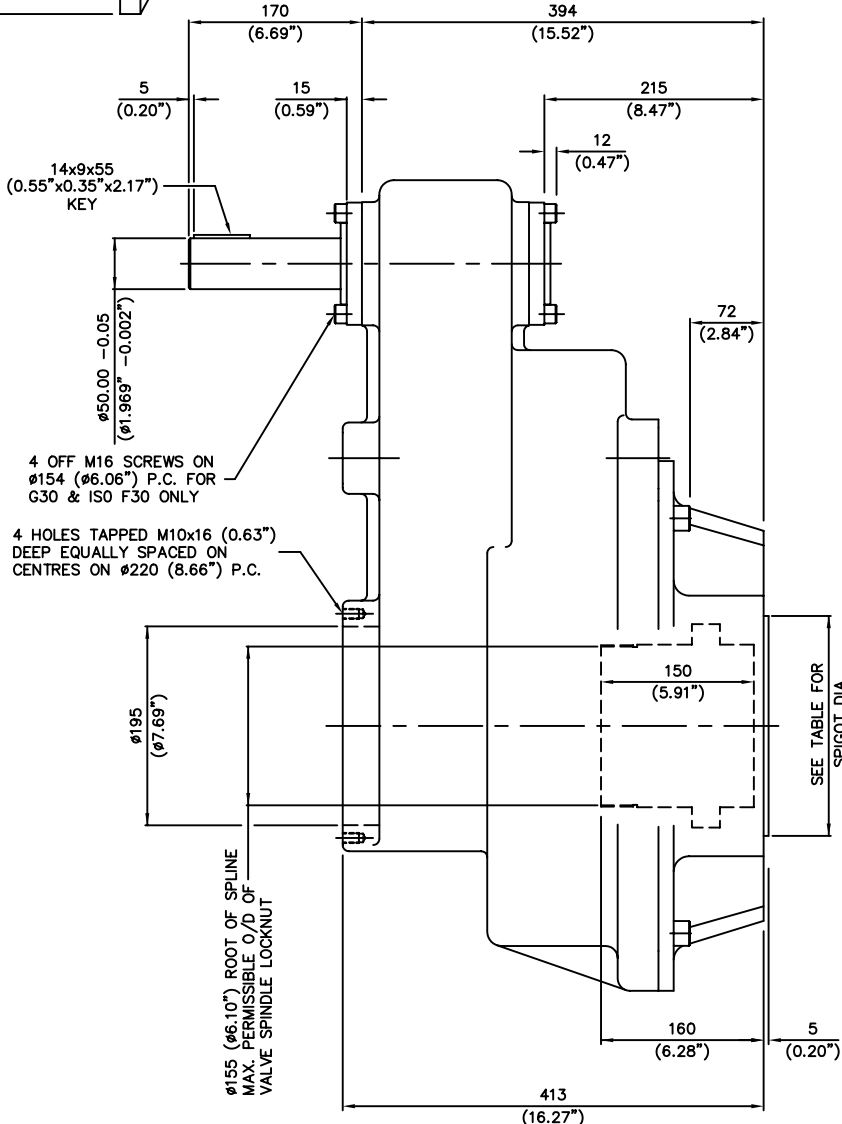

2	CN959 B.T. 20.11.97
1	CN915 JMO 19.6.97
A	ORIGINAL ISSUE
ISSUE	ALTERATIONS

BASEPLATE DETAILS		
	SPIGOT DIA.	HOLE DETAILS (22.5" OFF CENTRES)
ISO F35	ø259.95 -0.05 (ø10.234" -0.002")	8 HOLES M30x40 (1.57") DEEP ON ø356.0 (ø14.02") P.C.
FA35	ø215.80 -0.20 (ø8.496" -0.008")	8 HOLES 1"UNCx40 (1.57") DEEP ON ø355.6 (ø14.00") P.C.

NOMINAL RATIO	10:1	12:1	15:1
EXACT RATIO	9.86:1	12.00:1	15.00:1
FACTOR (MECH. ADVANTAGE)	8.87	10.80	13.50

DRAWN: -	S.W.	10.9.96	SCALE
CHECKED: -			1:2

