



INPUT FLANGE DETAILS					
	FLANGE O/DIA. & THICKNESS	SHAFT DIA.	RECESS DIA.	HOLE DETAILS (45° OFF CENTRES)	KEY DETAILS
ISO F10	ø125 (ø4.92") x 10 (0.39")	ø20.00 -0.05 (ø0.787" -0.002")	ø70.05 +0.05 (ø2.758" +0.002")	4 HOLES ø10.5 (ø0.41") ON ø102.0 (ø4.02") P.C.	6x6x40 (0.24"x0.24"x1.57")
FA10	ø125 (ø4.92") x 10 (0.39")	ø20.00 -0.05 (ø0.787" -0.002")	ø58.75 +0.05 (ø2.313" +0.002")	4 HOLES ø10.5 (ø0.41") ON ø102.0 (ø4.02") P.C.	6x6x40 (0.24"x0.24"x1.57")
ISO F14	ø175 (ø6.89") x 15 (0.59")	ø30.00 -0.05 (ø1.181" -0.002")	ø100.05 +0.05 (ø3.939" +0.002")	4 HOLES ø16.5 (ø0.65") ON ø140.0 (ø5.51") P.C.	8x7x40 (0.31"x0.28"x1.57")
FA14	ø175 (ø6.89") x 15 (0.59")	ø30.00 -0.05 (ø1.181" -0.002")	ø95.27 +0.05 (ø3.751" +0.002")	4 HOLES ø16.5 (ø0.65") ON ø140.0 (ø5.51") P.C.	8x7x40 (0.31"x0.28"x1.57")

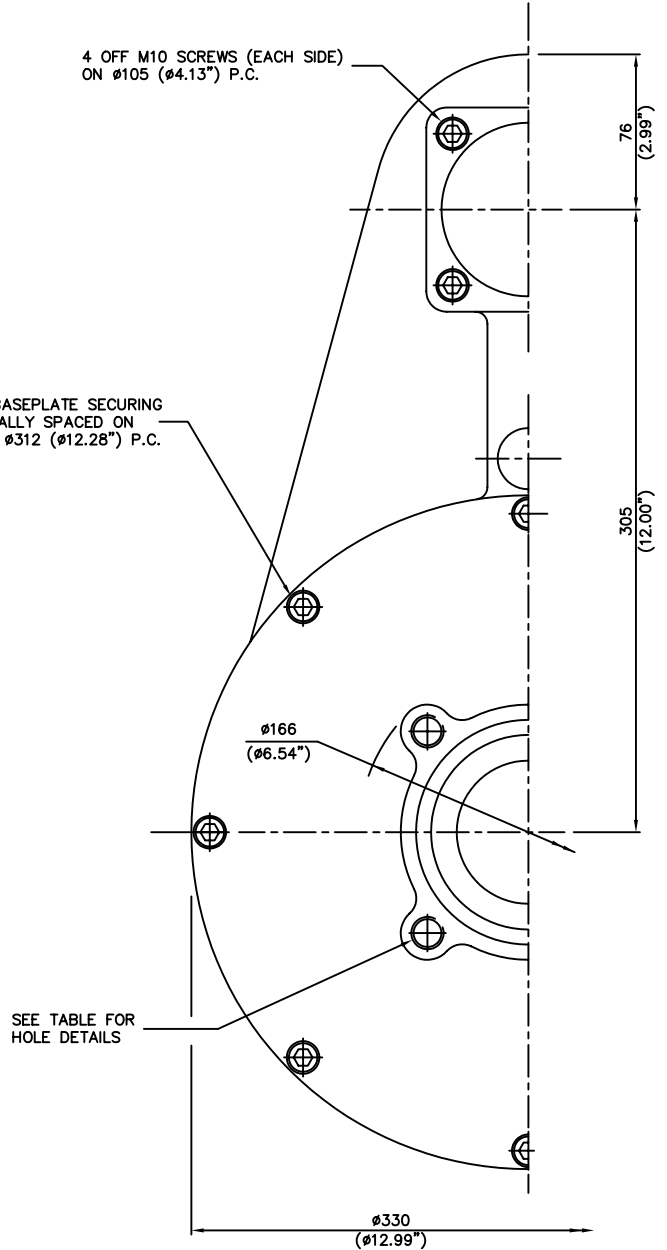

BASEPLATE DETAILS		
	SPIGOT DIA.	HOLE DETAILS (45° OFF CENTRES)
ISO F14	ø99.95 -0.05 (ø3.935" -0.002")	4 HOLES M16x20 (0.79") DEEP ON ø140.0 (ø5.51") P.C.
FA14	ø95.22 -0.10 (ø3.749" -0.004")	4 HOLES 5/8"UNCx20 (0.79") DEEP ON ø139.7 (ø5.50") P.C.

A	ORIGINAL ISSUE
ISSUE	ALTERATIONS

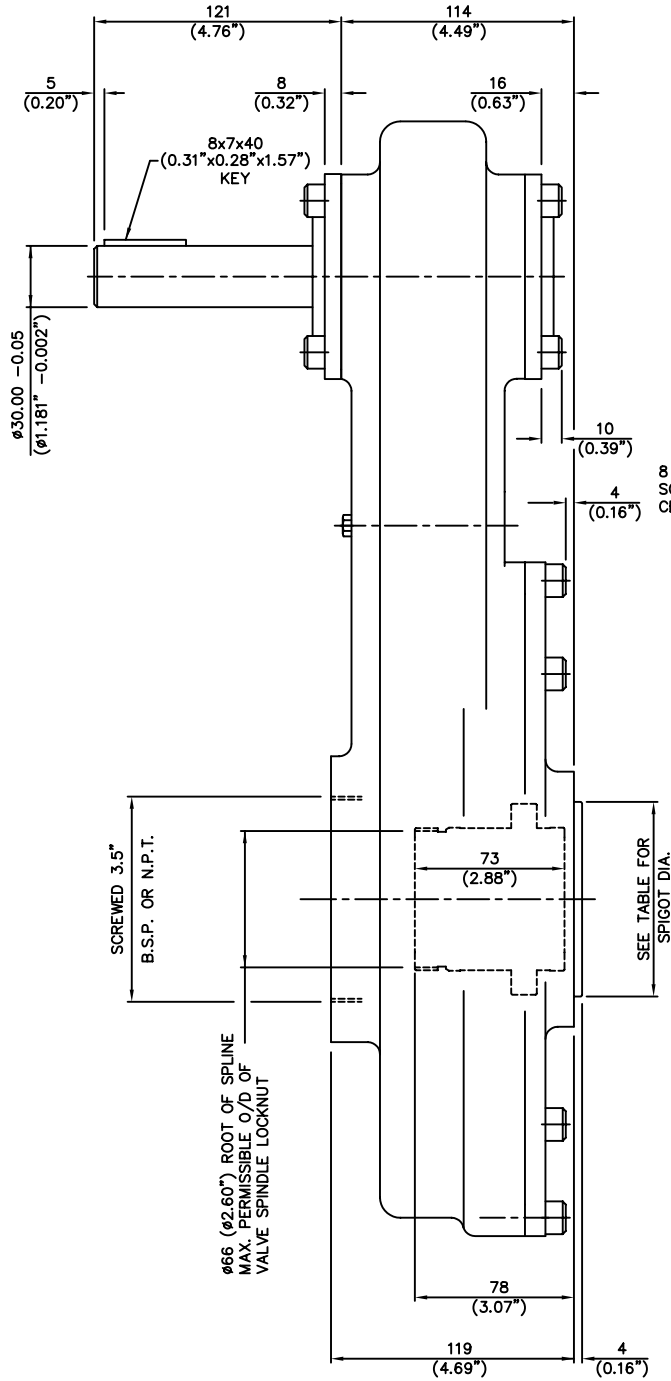

NOMINAL RATIO	2:1	3:1	4:1	6:1	8:1
EXACT RATIO	2.00:1	3.00:1	4.00:1	6.00:1	8.00:1
FACTOR (MECH. ADVANTAGE)	1.80	2.70	3.60	5.40	7.20

DRAWN: -	S.W.	10.9.96	SCALE
CHECKED: -			1:1

EXEECO LTD © 1996

OUTLINE DETAILS OF IS6  
ISO & USA STANDARD

PUB\IS6CD