
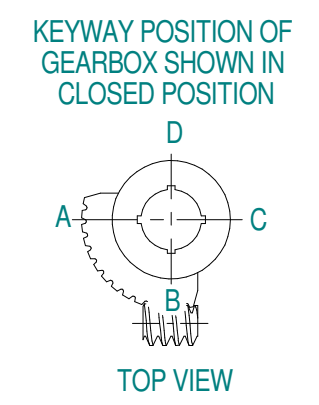


INPUT FLANGE DETAILS				MOUNTING HOLES - BOLT CIRCLE (OFF CENTRES)				STEM ACCEPTANCE IN ACCORDANCE TO STANDARD							
INPUT FLANGE	FLANGE O/DIA.	HOLE DETAILS (OFF CENTRES)	KEY DETAILS	ISO 5211 / MSS SP-101 MOUNTING OPTION	HOLE DETAILS (OFF CENTRES)	MAX OUTSIDE DIA. INCLUDING DRILLED HOLES	MIN INSIDE DIA. INCLUDING DRILLED HOLES	STANDARD	MIN BORE	SQ KEY MAX BORE	SQ KEY SIZE	RECT. KEY MAX BORE	RECT KEY SIZE	SQ BORE MAX	
F10	Ø125 (Ø4.92")	4x Ø11 ON A Ø102P.C. (4x Ø0.43" ON A Ø4.02"P.C.)	6x6x36 (0.24"x0.24"x1.42")	F10 (FA10)	4x M10* x 13 DEEP ON A Ø102P.C. (4x 3/8"UNC x 0.51" DEEP ON A Ø4"P.C.)	Ø215 (Ø8.46")	Ø87 (Ø3.43")	BS4235	-	-	-	-	-	-	-
				F12 (FA12)	4x M12* x 16 DEEP ON A Ø125P.C. (4x 1/2"UNC x 0.63" DEEP ON A 4.95"P.C.)			BS46	-	-	-	-	-	-	
				F14 (FA14)	4x M16* x 18 DEEP ON A Ø140P.C. (4x 5/8"UNC x 0.71" DEEP ON A Ø5.5"P.C.)			ANSI B17.1	Ø0.79"	Ø2.56"	-	-	-	□ 1.98"	
				F16 (FA16)	4x M20* x 18 DEEP ON A Ø165P.C. (4x 3/4"UNC x 0.71" DEEP ON A Ø6.5"P.C.)			DIN 6885	Ø20	Ø65	-	-	-	□ 50	

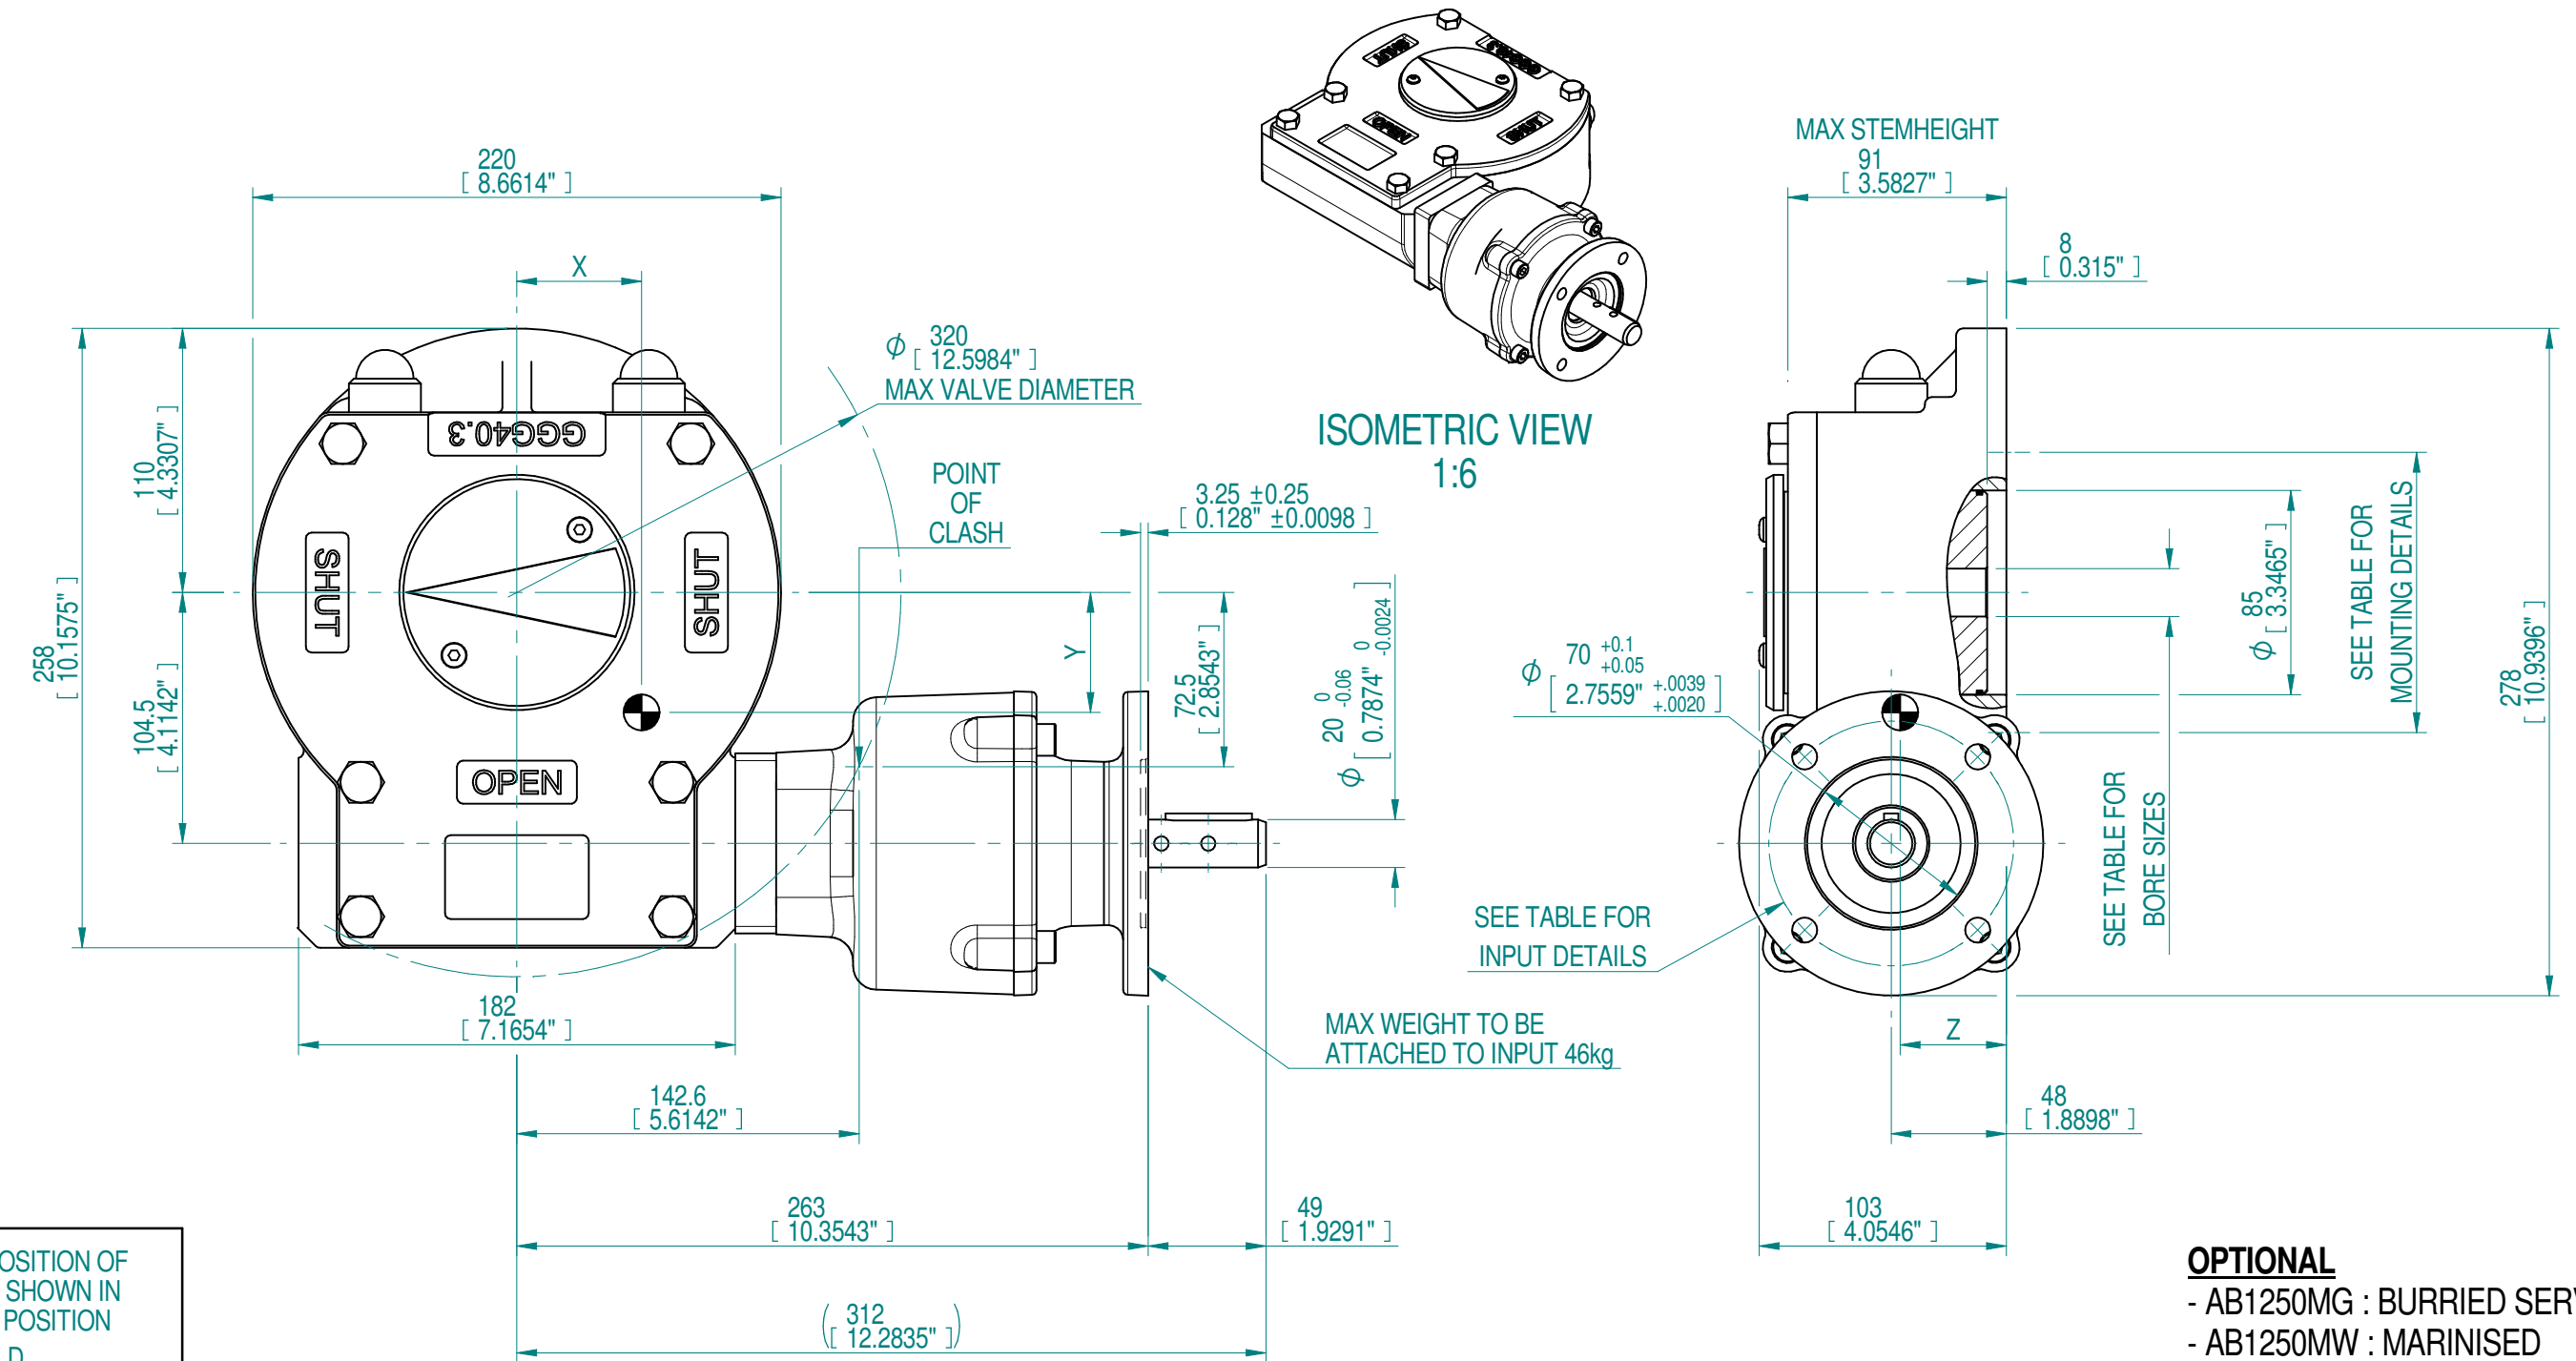

NOTES:
1. * THREAD DEPTH DOES NOT MATCH ISO STANDARD

DESCRIPTION	TORQUE	CENTRE OF GRAVITY
RATIO	200.7	52
TURNS TO CLOSE	50.18	50
M.A.	57.8 ± 15%	44.3
WEIGHT	29.5 kg 64.9 lbs.	2.05"
MAX OUTPUT	2000 Nm 17700 lbf.in.	1.97"
MAX INPUT	35 Nm 310 lbf.in.	1.74"
X		
Y		
Z		

OPTIONAL
- AB1250MG : BURRIED SERVICE
- AB1250MW : MARINISED

AS PART OF CONTINUOUS PRODUCT DEVELOPMENT, ALL DETAILS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE. FOR UP TO DATE DETAILS PLEASE VISIT www.rotork.com

rotork Gears
LOSSER - THE NETHERLANDS
www.rotork.com

This drawing is confidential and is the property of Rotork Gears and must not be reproduced either wholly or partly. All rights in respect of patents, designs and copyrights are reserved. © 2016

Document Type	DETAIL DRAWING		Title	GEARBOX AB1250-PR4 MOTORISED, NORMAL DUTY LEFT HANDED	
Created	robbin.goosen	28-9-2016	Drawing Number	AB1250MN-PR4 LH	
Checked	Henk Hoff	28-9-2016	Iss.	02	
Approved			Sheet	1 of 1	Size A3