

**CONDUIT ENTRY HOLE** 

Metric M32

M25


M20

PARAMETER

Hole

Α В

С



## **CONDUIT ENTRIES**

1. THRUST BASE. PLEASE REFER TO THE TECHNICAL DATA SECTION OF OF MAXIMUM AXIAL THRUST RATINGS.

2. BASEPLATE DETAILS: F10/FA10.
3. DIMENSIONS WITH " INDICATE COVER REMOVAL ALLOWANCE
4. THE INTERFACE PROVIDED FOR MOUNTING THE ACTUATOR OR SECOND STAGE GEARBOX ONTO THE VALVE SHOULD CONFORM TO GOOD ENGINEERING PRACTICES, ENSURING ADEQUATELY

TOLERANCED LIMITS FOR PARALLELISM, PERPENDICULARITY AND CONCENTRICITY.

5. ROTORK CANNOT BE HELD LIABLE FOR DAMAGE TO OUR EQUIPMENT CAUSED
BY EXCESSIVE LOADING FROM COVER TUBES, HANDWHEEL AND HAND LEVER.

BROCHURE FOR DETAILS	

DRAWING TYPE INSTALLATION DRAWING ACTUATOR CK(R)C120 GEARBOX1 00 NO G.B.1 GEARBOX2 N0 NO G.B.2 CENTRONIK / TERMINAL CTK/3 COND В MECHANISM / MOTOR STD. MECH/LARGE MOT HANDWHEEL / REAR / FRONT STD.H.W./STD.REAR./STD.FRNT.

VALUE

DESCRIPTION

ORIENTATION STD. ORIENT **Doc Number** Ver No Sheet No **A**4 Scale 1 of 2

NPT


1 1/4


3/4"

3/4"

2 · 2 / 0 2 0 0 / 1 2 0 / 1 2 / 1 0 / 1 0 0 0 / 2 / 1 / 1 0 2 2 0 / 1 / 1 1 2 2 / 1 / 1 2 / 1 / 1 2 / 1 / 1							
		R.TAMIL	02-02-18	Title	DIMENSIONAL DRAWING, CKC120 & C CENTRONIK / 3 CONDUIT ENTRIES. LARG		
	Checked	BHARAT	02-02-18		STANDARD ORIENTATION		
	Approved	JOSE	02-02-18	This drawing a whole or in pa	and the information it contains are property of Rotork Controls Limited, and they will not be re rt, without the prior written consent of Rotork.		

DIMENSIONAL DRAWING, CKC120 & CKRC120, CENTRONIK / 3 CONDUIT ENTRIES, LARGE MOTOR, STANDARD ORIENTATION

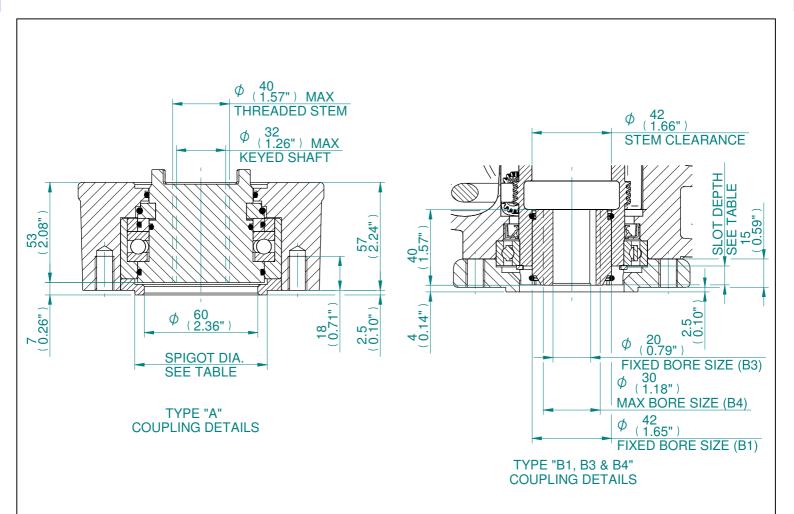

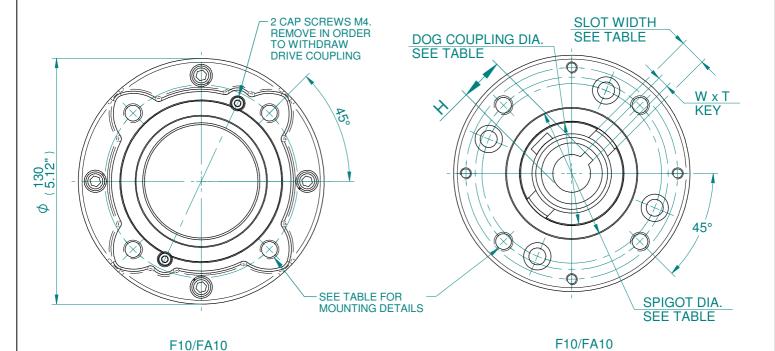

DOG COUPLING DETAILS					
SLOT WIDTH	14				
SLOT DEPTH	10				
DOG COUPLING DIA.	Ø54				

THRUST BASE

B1, B3 & B4 KEY	DETAILS
DESCRIPTION	F10/FA10
KEY (B1) WxT	12x8
KEY (B3) WxT	6x6
MAX. KEY (B4) WxT	8x7
H (B1)	45.3
H (B3)	22.8
H (B4) MAX	33.3

D1 D2 0 D4 VEV DETAIL C

BASEPLATE MOUNTING DETAILS							
TYPE	BASEPLATE	SPIGOT DIA.	HOLE DETAILS (45° OFF CENTRES)				
ISO F10	STANDARD	Ø69.970/69.924	4 HOLES M10x15 (0.59") DEEP				
150 F10			ON Ø102.0 (Ø4.02") P.C.				
FA10		Ø2.310/2.305"	4 HOLES 3/8"UNCx15 (0.59") DEEP				
LAIU		£2.310/2.303	ON Ø101.6 (Ø4.00") P.C.				

NON-THRUST BASE (B1, B3 & B4)

<b>a</b> 6	Drawn	R.TAMIL	02-02-18	Title	DIMENSIONAL DRAWING, CKC120 & CKRC120, CENTRONIK / 3 CONDUIT ENTRIES. LARGE MOTOR.		Doc Number	Ver No	Scale	Sheet No
	Checked	BHARAT	02-02-18	Title	STANDARD ORIENTATION		500N0B000X	2	NITO	2 of 2
₫	Approved	JOSE	02-02-18	This drawing a whole or in pa	and the information it contains are property of Rotork Controls Limit ed, and they will not be reproduced or disclosed, in rt, without the prior written consent of Rotork.	A	NOUNDOUGA	3	1113	2 01 2