

NOTE

1. GEARBOX RATIOS: 140,210,280:1.

2. GEARBOX BASEPLATE: F16/FA16, F25/FA25 & F30/FA30.

3. DIMENSIONS WITH "* INDICATE COVER REMOVAL ALLOWANCE

4. THE INTERFACE PROVIDED FOR MOUNTING THE ACTUATOR OR SECOND STAGE GEARBOX ONTO THE VALVE SHOULD CONFORM TO GOOD ENGINEERING PRACTICES, ENSURING ADEQUATELY TOLERANCED LIMITS FOR PARALLELISM, PERPENDICULARITY AND CONCENTRICITY.

5. ROTORK CANNOT BE HELD LIABLE FOR DAMAGE TO OUR EQUIPMENT CAUSED BY EXCESSIVE LOADING FROM COVER TUBES, HANDWHEEL AND HAND LEVER.

	— 9.	Drawn	TAMIL	05-03-19	Title	DIMENSION RATIO. 3 CON
C		Checked	BHARAT	05-03-19		nario, 3 con
	₽	Approved	JOSE	05-03-19	This drawing a	and the information it contains

NAL DRAWING, CK120 & CKR120, IW6, LOW NDUIT ENTRIES, SMALL MOTOR, STANDARD ORIENTATION

Δ4	Doc Number	Ver	No Scale Sheet No	
	ORIENTATION	0	STD.ORIENT.	
	HANDWHEEL / REAR / FRONT		STD.H.W./STD.REAR/STD.FRNT.	
	MECHANISM / MOTOR		STD.MECH/SMALL MOT.	
TERMINAL COVER B 3 COND		3 COND		
	GEARBOX2	RL	LOW RATIO	
	GEARBOX1		IW6	

DRAWING TYPE


ACTUATOR


A2W6RLBS00X 1 NTS 1 of 2


INSTALLATION DRAWING

CK(R)120

CONDUIT ENTRY HOLE				
Hole	Metric	NPT		
Α	M32	1 1/4"		
В	M25	3/4"		
С	M20	3/4"		

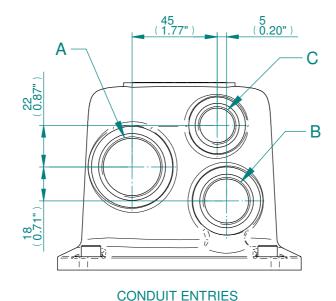

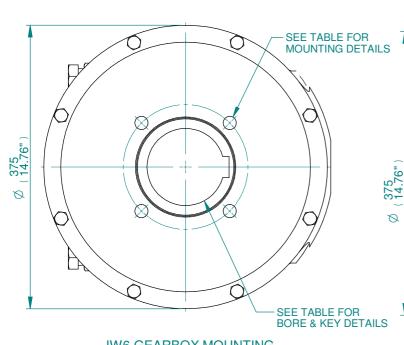

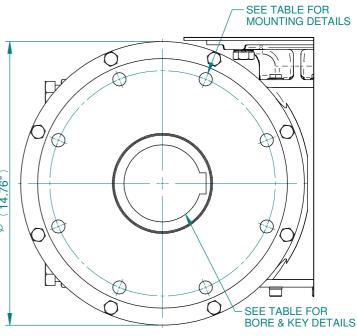

IW6 GEARBOX MOUNTING DETAILS FOR F16/FA16

IW6 GEARBOX MOUNTING DETAILS FOR F25/FA25 & F30/FA30

BASEPLATE	Х	Y	Z
STANDARD THICKNESS	70	113	139
FILLED THICKNESS	70	113	139
WAFER THICKNESS	93	136	162

	MAX BORE SQ KEY		MAX BORE RECTANGULAR KEY	
STD	BORE	KEY	BORE	KEY
BS4235	-	-	102	28X16
BS46	3.625"	1"SQ	3.75"	1"X3/4"
ANSI B17.1	3.75"	7/8"SQ	3.875"	1"X3/4"

BASEPLATE DETAILS				
TYPE	BASEPLATE	HOLE DETAILS (45° OFF CENTRES)		
ISO F16		4 HOLES M20X20 (0.79") DEEP		
150 F16	STANDARD	ON Ø165.0 (Ø6.50") P.C.		
FA16	STANDARD	4 HOLES 3/4"UNCX20 (0.79") DEEP		
FAIO		ON Ø165.0 (Ø6.50") P.C.		
TYPE	BASEPLATE	HOLE DETAILS (22.5° OFF CENTRES)		
ISO F25		8 HOLES M16X16 (0.63") DEEP		
150 F25	STANDARD	ON Ø254.00 (Ø10.00") P.C.		
FA25	STANDARD	8 HOLES 5/8"UNCX16 (0.63") DEEP		
FA25		ON Ø254.00 (Ø10.00") P.C.		
ISO F30		8 HOLES M20X30 (1.18") DEEP		
150 F30	FILLED & WAFER	ON Ø298.00 (Ø11.73") P.C.		
FA30	FILLED & WAFER	8 HOLES 3/4"UNCX30 (1.18") DEEP		
FA30		ON Ø298.00 (Ø11.73") P.C.		

	υ	Dra
	<u>-</u>	Che
T q	<u> </u>	Appi

ر	Drawn	TAMIL	05-03-19	Title	DIMENSIONAL DRAWING, CK120 & CKR120, IW6, LOW RATIO, 3 CONDUIT ENTRIES, SMALL MOTOR, STANDARI	
-	Checked	BHARAT	05-03-19		ORIENTATION	
_	Approved	JOSE	05-03-19	This drawing and the information it contains are property of Rotork Controls Limited, and they will not be reproduced or disclosed, whole or in part, without the prior written consent of Rotork.		

DIMENSIONAL DRAWING, CK120 & CKR120, IW6, LOW RATIO, 3 CONDUIT ENTRIES, SMALL MOTOR, STANDARD ORIENTATION

A4	Doc Number
A	2W6RLBS00X