


RCEL

Mounting PIU kit


Instruction

1

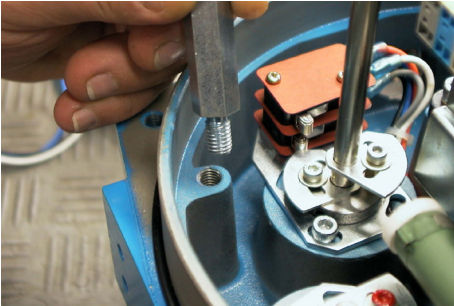


1. Montera pelare.
1. Mount the pillars.
1. Die Distanzbolzen einbauen.

2

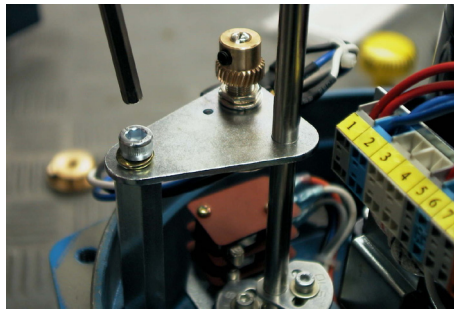

2. Montera potentiometerenheten.
2. Mount the potentiometer unit.
2. Die Potentiometereinheit einbauen.

3

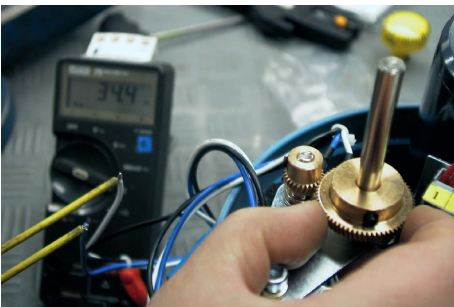


3. Med eldonet i stängt läge monteras primärdrevet och justeras till ca 35 Ohm mellan terminal 2 (blå) och 3 (vit) på potentiometern.

3. The primary gear is mounted with the electric actuator in closed position and adjusted to ca. 35 Ohm between terminal 2 (blue) and 3 (white) on the potentiometer.


3. Den elektrischen Schwenkantrieb in geschlossener Lage fahren und das Primärritzel einbauen und bei ca. 35 Ohm zwischen Klemmen 2 (Blau) und 3 (Weiß) auf dem Potentiometer einstellen.

4

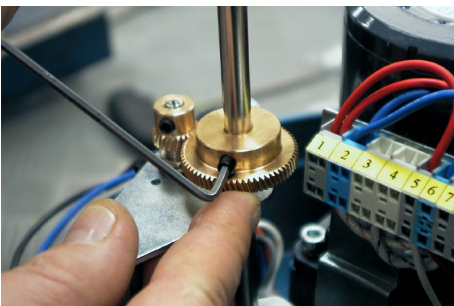

4. Dra fast primärdrevet.
4. Tighten the primary gear.
4. Das Primärritzel festziehen.

5

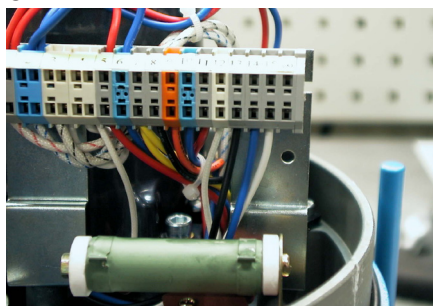

5. Anslut kablar till plint enligt el-schema.
5. Connect cables to the terminal strip acc. to the electric diagram.
5. Die Kabel zur Klemmenleiste gem. elektrischem Klemmplan anschließen.

